



Date
Quote #
Project Name
Type



VANDALUME - Post Top

Description:

Constructed of a one-piece driver compartment and spun aluminum skirt. Prismatic lens is standard. All external hardware is stainless steel. Dark sky cut-off compliant.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
VDS	S 60W LED (Max)	7800	2700K	UNV 120-277V
VDL	L 120 LED (Max)	13872	3000K	HLV 347-480V
	250 HPS		3500K	TT Tri-Tap(HID)
	250 MH		4000K	MT Multi-Tap(HID)
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
PT3 Post top slips over 3" dia pole	PR Prismatic lens (K12)	TY5 Type V (Std)	SD Step dimming	Standard
			MS Motion sensor	BL Black
PT4 Post top slips over 4" dia pole		TY3 Type III	PC Button photocell	WH White
			SF Single fuse	SG Silver Grey
PIM Pier mount			DF Double fuse	BZ Bronze
			PCR Photocell receptacle	Custom
			TP Tamperproof hardware	CC Custom Color
			TS Tamperproof screws	See website for custom colors. Contact factory for physical samples.
			TCO Trespass cut off	







- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

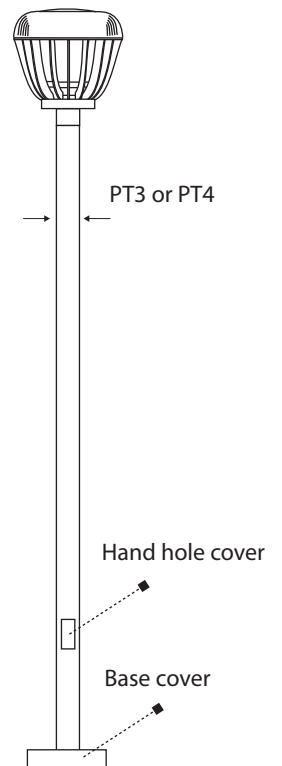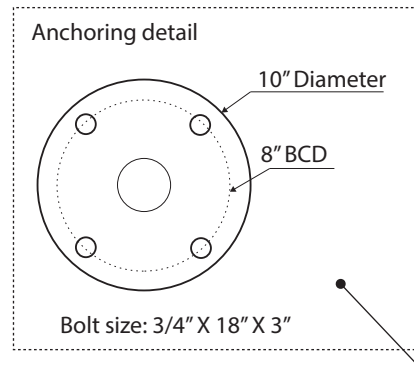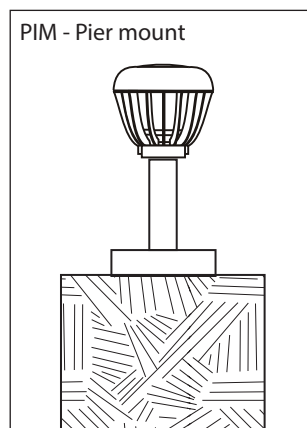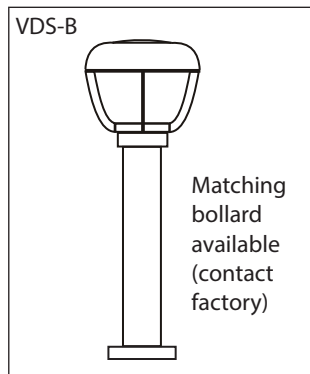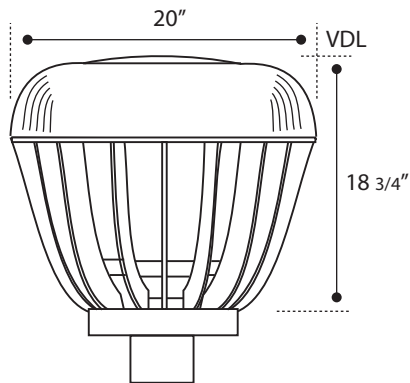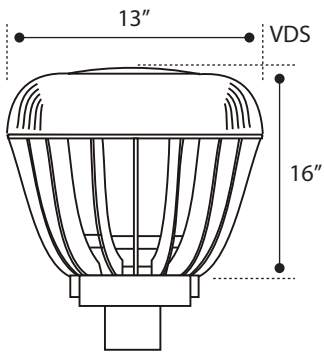

Listing:

Complies to CSA and UL standards.

Polar Graph:

