



Date
Quote #
Project Name
Type



## VELO - Pendant

### Description:

Constructed of fabricated aluminum and an opal acrylic lens. Rectangular cuboid design provides an encompassing glow pattern. All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
VELO-24	18 LED (Max)	3168	2700K	UNV 120-277V
VELO-36	24 LED (Max)	4224	3000K	HLV 347-480V
VELO-48	44 LED (Max)	7744	3500K	
VELO-96	60 LED (Max)	10560	4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
4AC48 4X48" aircraft cables	OAL Opal acrylic lens (Std)	EG Encompassing glow	DM 0-10V dimming	Aluminum frame only Standard
CM Ceiling mount			DM1 1% dimming	BL Black
			EM Emergency battery	WH White
			SF Single fuse	SG Silver Grey
			RGBW Programmable color changing LEDs	BZ Bronze
				Custom
				CC Custom Color

See website for custom colors. Contact factory for physical samples.



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





**Dimensions & Mounting:**

Please note that drawings are not to scale.

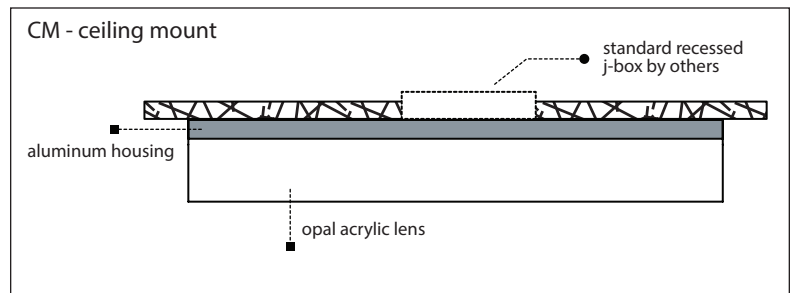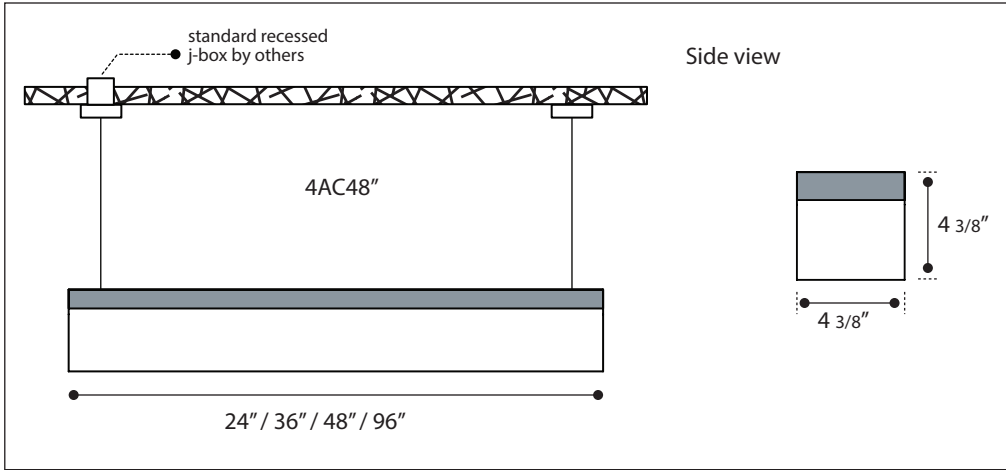

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

