

Date:
Type:
Project:



## VENUS - BOLLARD

Upper assembly display consists of an hour-glass look with curvilinear bars. Silicone sealed lens for weather protection. Frosted acrylic lens is standard. All external hardware is stainless steel. Ideal for outdoor walkways.

Name	Light Engine	Source Lumens*	Color Temp	Electrical		Mounting	
VENUS	36 W LED (Max)	4680	3000K	UNV	120-277V	ABT	Anchor, Bolts, & Template
			4000K	HLV	347-480V		
			5000K				
	Contact Solera for other Wattages		Specify other				Contact Solera for other lengths

Lens		Optics		Options		Finishes	
FAL	Frosted acrylic lens (Std)	TY5	Type V (Std)	TP	Tamperproof Hardware	BL	Black
OAL	Opal acrylic lens	TY3	Type III	TS	Tamperproof Screwdriver	WH	White
		180	180 degrees	SF	Single Fuse	SG	Silver Gray
				PC	Button Photocell, voltage specific	BZ	Bronze
				MS	Motion Sensor	CC	Custom Color
				GFR	Ground Fault Receptacle	CONC	Concrete (shaft only)
				SD	Step dimming		
							<a href="#">See finishes page on website</a>


\* General lumens are based on Max Wattage and 5000K CCT  
Std – Standard offering

VENUS- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

### Customization Notes:

→ Info on this spec sheet will change without notice as product development is an ongoing process.  
Date modified: 07-15-2021

## Dimensions & Mounting (drawings are not to scale)

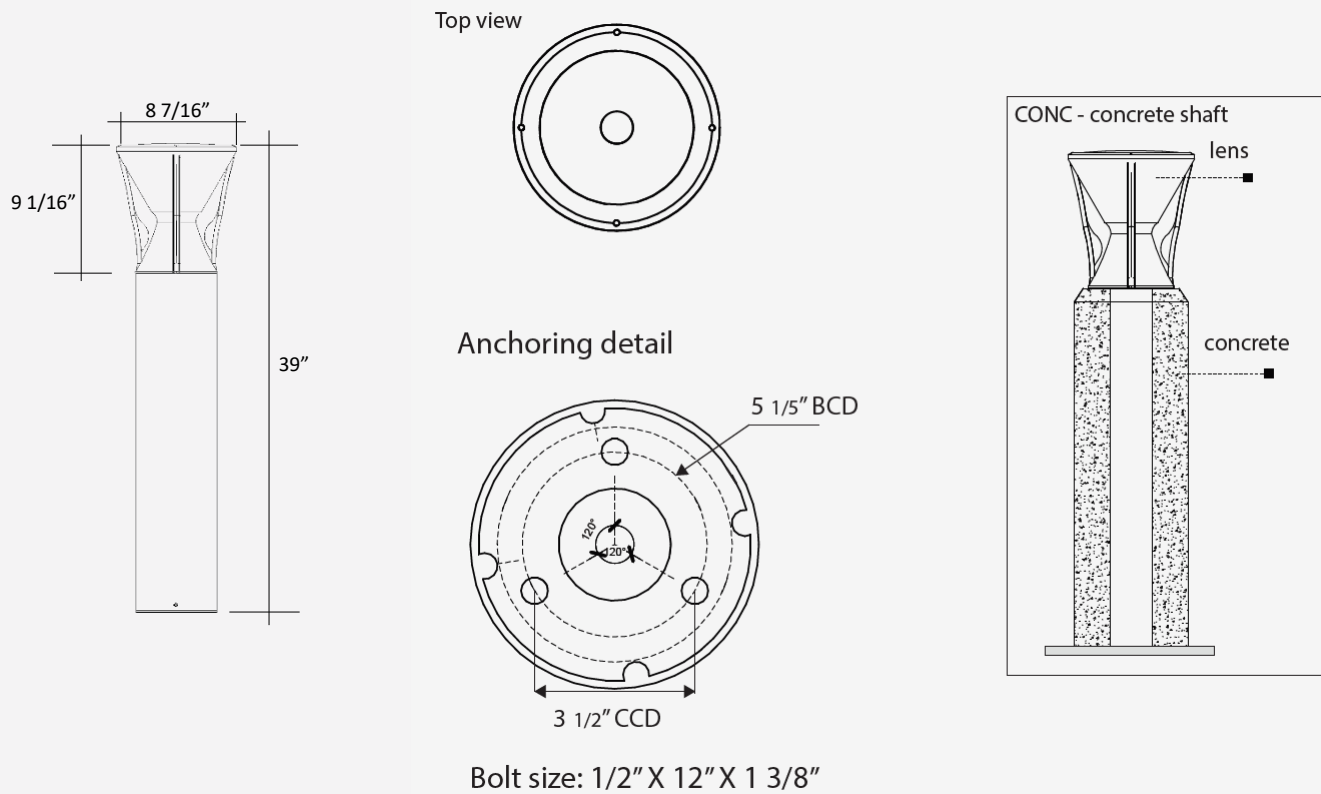

## Polar Graph

