

Date: _____

Type: _____

Project: _____

YUMI LIGHT COLUMN

A cylindrical decorative light column made from heavy duty aluminum extrusion. Customizable length up to 15ft. Customizable rotation angle.

Construction: Fixture housing constructed from 6061 aluminum alloy. Weatherproof silicon gasket seal for all weather protection. Stainless steel external hardware for corrosion resistance.

Mounting: Aluminum anchoring base mounts to 4 flush mounted anchor bolts.

Lens: Opal lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance
3000K, 3500K, 4000K, 5000K color temperature
Available in RGBW.





Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 5kV native surge protection and 4kV EFT with Ambient Operating Temperature -40°C to 55°C.

Options: Natatorium finish, 0-10V Dimming, 10KV surge protector, ground fault receptacle, tamperproof hardware, tamperproof bits

Finish: Black, white, silver gray, bronze.
(Custom color available upon request)

Listing: Complies with CSA & UL.
Approved for outdoor location.

Warranty: 5- Year limited warranty

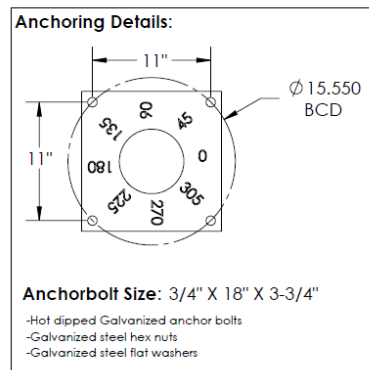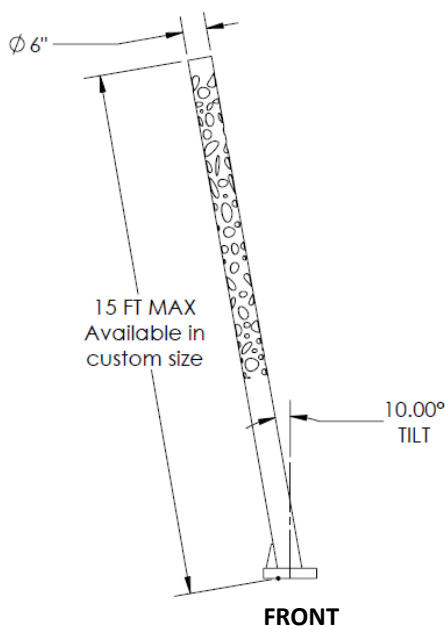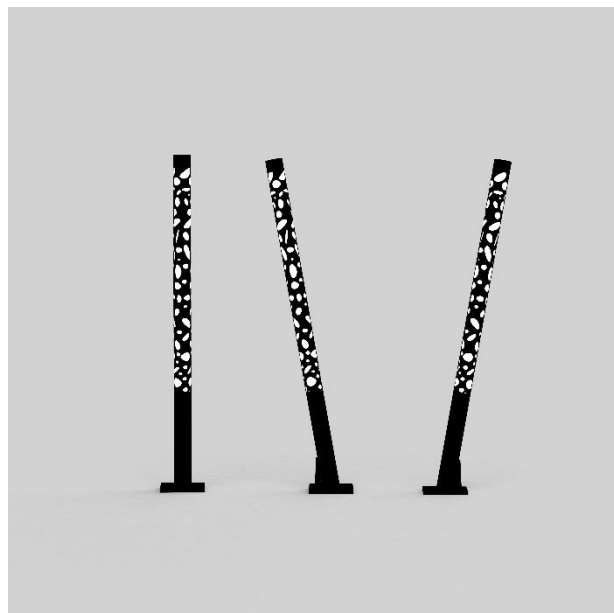

**CUSTOM ARCHITECTURAL LIGHTING**

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9

Fax: 905 457 1115

www.soleracorp.com

--	--	--	--	--	--	--	--	--	--	--

Name	Height	Tilt	Rotation	Light Engine	Color Temp.	Electrical	Mounting	Lens	Options	Finish
YUMI	Specify height (15ft max.)	10° ST	0°	90 W (max)	3000K	UNV HLV	ABT	OPL	DM	BL
			45°		3500K				GFR	BZ
			90°		4000K				TP	WH
			135°		5000K				TS	SG
			180°		RGBW				SP10	CC
			225°							
			270°							
			305°							

Notes:

- 3000K – 156 lm/w*
- 3500K – 159 lm/w*
- 4000K – 164 lm/w*
- 5000K – 166 lm/w*
- RGBW – Programmable color changing LEDs
- ST – Straight column
- UNV – Universal voltage (120V - 277V)
- HLV – 347V line voltage
- ABT – Anchors, bolts, template
- OPL – Opal lens
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V dimming
- GFR – Ground fault receptacle
- SP10 – Surge protector up to 10KV
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)

*Does not apply to RGBW