

Date: _____

Type: _____

Project: _____

ZANI PENDANT

Presenting ZANI! Our matchstick fixture comes with an illuminated tip to brighten spaces with soft radiance. These are very narrow pendant sticks. We offer 1" or 1.5" diameter with 6" or 12" housing. With a tip that glows, it gives an edge-lit look. Create an eye-catching design using multiple rods in series or in cluster. Contact the factory for custom sizing.

Construction: These stick lights feature a durable, solid aluminum fixture housing in 6" or 12" height. Diameter can be either 1" or 1.5".

Mounting: It is suitable to mount over octagonal J-box as a single pendant, in series, or in clusters. Mounted by power cord with strain relief. Specify the mounting height.

Lens: Choose from clear or white solid lens to emphasize the beautiful glow at the tip. Silicone-sealed for added durability.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Exudes an encompassing glow


Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: 0-10V dimming, remoted driver


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped housing with vast array of pattern options to choose from

Listing: complies with CSA & UL standards; label for indoor location

Warranty: 5-year limited warranty

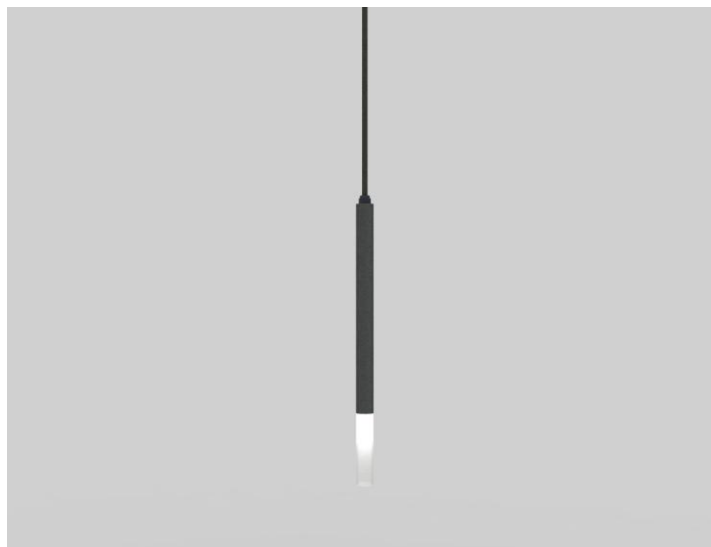

ZANI:

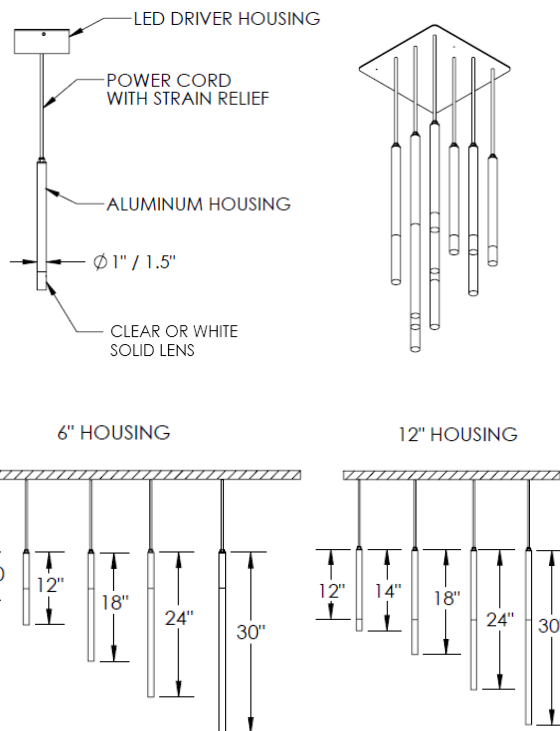



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--	--

Name	Diameter	Light Engine	Housing Height	Electrical	Color Temp	Mounting (Specific height)	Solid Lens	Light Pattern	Options	Finish
ZANI-I	1"	3W LED	6"	UNV	3000K	POWER CORD	CL	EG (Std)	DM	BL
ZANI-II	1.5"	11W LED	12"	HLV	3500K	WITH STRAIN RELIEF	WI		RB	BZ
					4000K					SG
					5000K					WH
										BA4
										CC
										H-Dip
contact factory for custom sizing										

Notes:

- 3000K – 160* lm/w, general
- 3500K – 167* lm/w, general
- 4000K – 171* lm/w, general
- 5000K – 173* lm/w, general
- UNV – Universal voltage (120-277V)
- HLV – High low voltage (347-480V)
- CL – clear solid lens
- WI – white solid lens
- EG – Encompassing glow
- DM – 0-10V dimming
- RB – Remote driver
- BL – Minitex black
- BZ – Minitex bronze
- SG – Minitex silver grey
- WH – Minitex white
- BA4 – Brushed aluminum #4
- CC – Custom color (confirm RAL No. prior to production)
- H-Dip – Hydro-dipped housing (contact factory for pattern design option)

*Does not apply to ZANI-II. Contact Factory.