

Date: _____

Type: _____

Project: _____

ZOLO BOLLARD

Modern & simplistic design with angled upper assembly. Body has smooth and sharp corners.

Construction: Fixture housing constructed from 6061 aluminum alloy. Weatherproof silicon gasket seal for all weather protection. Stainless steel external hardware for corrosion resistance.

Mounting: Aluminum base anchors to 4 flush-mounted bolts.

Lamp: High power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance
3000K, 3500K, 4000K, 5000K color temperature
CRI 80

Light distribution: Forward throw


Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 2kV native surge protection and 2.5kV ringwave with 90°C maximum case hot spot temperature. Operating temperature ranging between -10°C to 50°C.

Options: 0-10V Dimming, 5KV/10KV/15KV surge protector, single fuse, ground fault receptacle, custom height (contact Factory)


Finish: Black, White, Silver Gray, Bronze
(Custom color available upon request)

Listing: Complies with CSA & UL Standards, for indoor and outdoor location.

Warranty: [5-year limited warranty](#)

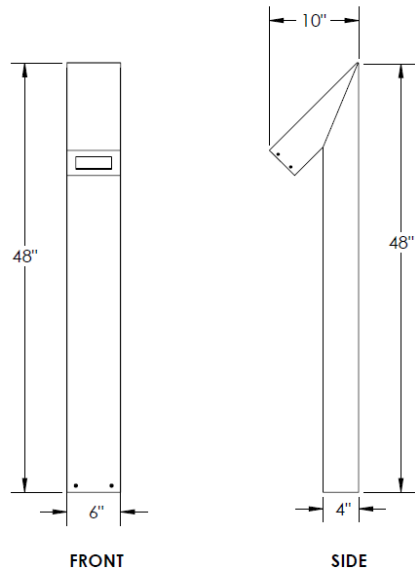

MOUNTING DETAILS:



Anchorbolt Size: 1/2" X 12" X 1-3/8"

- Hot dipped Galvanized anchor bolts
- Galvanized steel hex nuts
- Galvanized steel flat washers

--	--	--	--	--	--	--	--	--	--

Name	Height (inches)	Light Engine	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish	
ZOLO	48	16 W LED (max)	3000K 3500K 4000K 5000K	UNV HLV	ABT	CPL	FT	SF TP/TS DM GFR	SP5 SP10 SP15	BL BZ WH SG
Contact Factory for custom height										
CC										

Notes:

- 3000K – 152 Source lm/w
- 3500K – 157 Source lm/w
- 4000K – 160 Source lm/w
- 5000K – 160 Source lm/w
- UNV – Universal voltage (120V - 277V)
- HLV – High Low voltage (347V - 480V)
- ABT – Anchors, bolts, template
- CPL – Clear lens
- FT – Forward throw
- TP/TS – Tamperproof hardware
- DM – 0-10V dimming
- GFR – Ground fault receptacle
- SP5 – Surge protector up to 5 KV
- SP10 – Surge protector up to 10 KV
- SP15 – Surge protector up to 15 KV
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)